Ringlock Scaffolding System is manufactured using 48.3mm O.D steel tubes with thickness ranging from 3.0mm to 3.2mm. The system is based on rosette joints welded at 500mm intervals, allowing fast assembly and dismantling with high load-bearing capacity and minimum requirement of skilled labour.

Ringlock components available with us are as follows –

Ledger / Horizontal, Brace / Diagonal, Standard / Vertical, Side Bracket, Truss Ledger

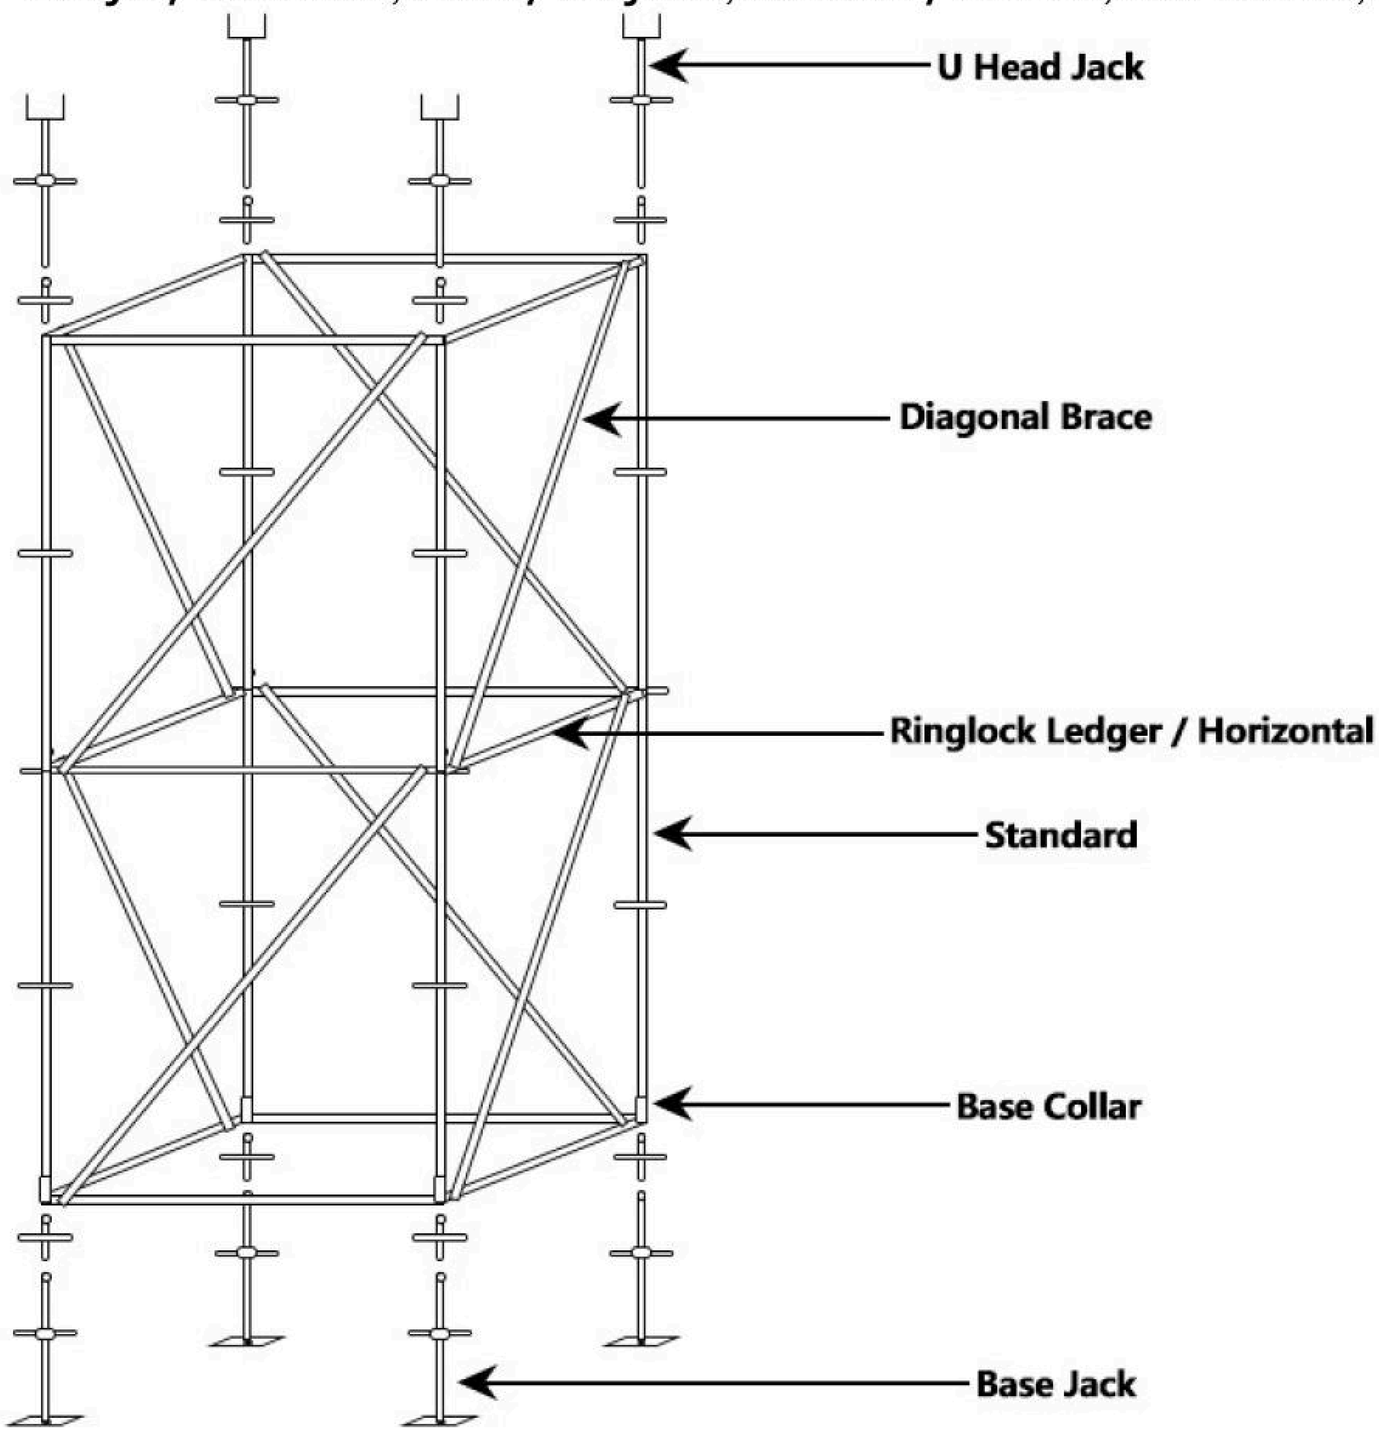

Ledger/Horizontal

Brace/Diagonal

Standard/Vertical

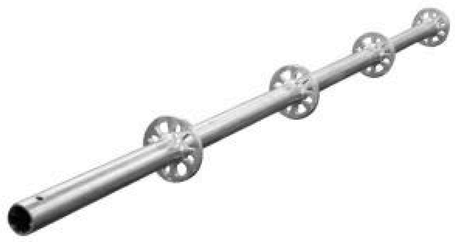

Base Collar

Truss Ledger